


CVV60-C Installation drawing

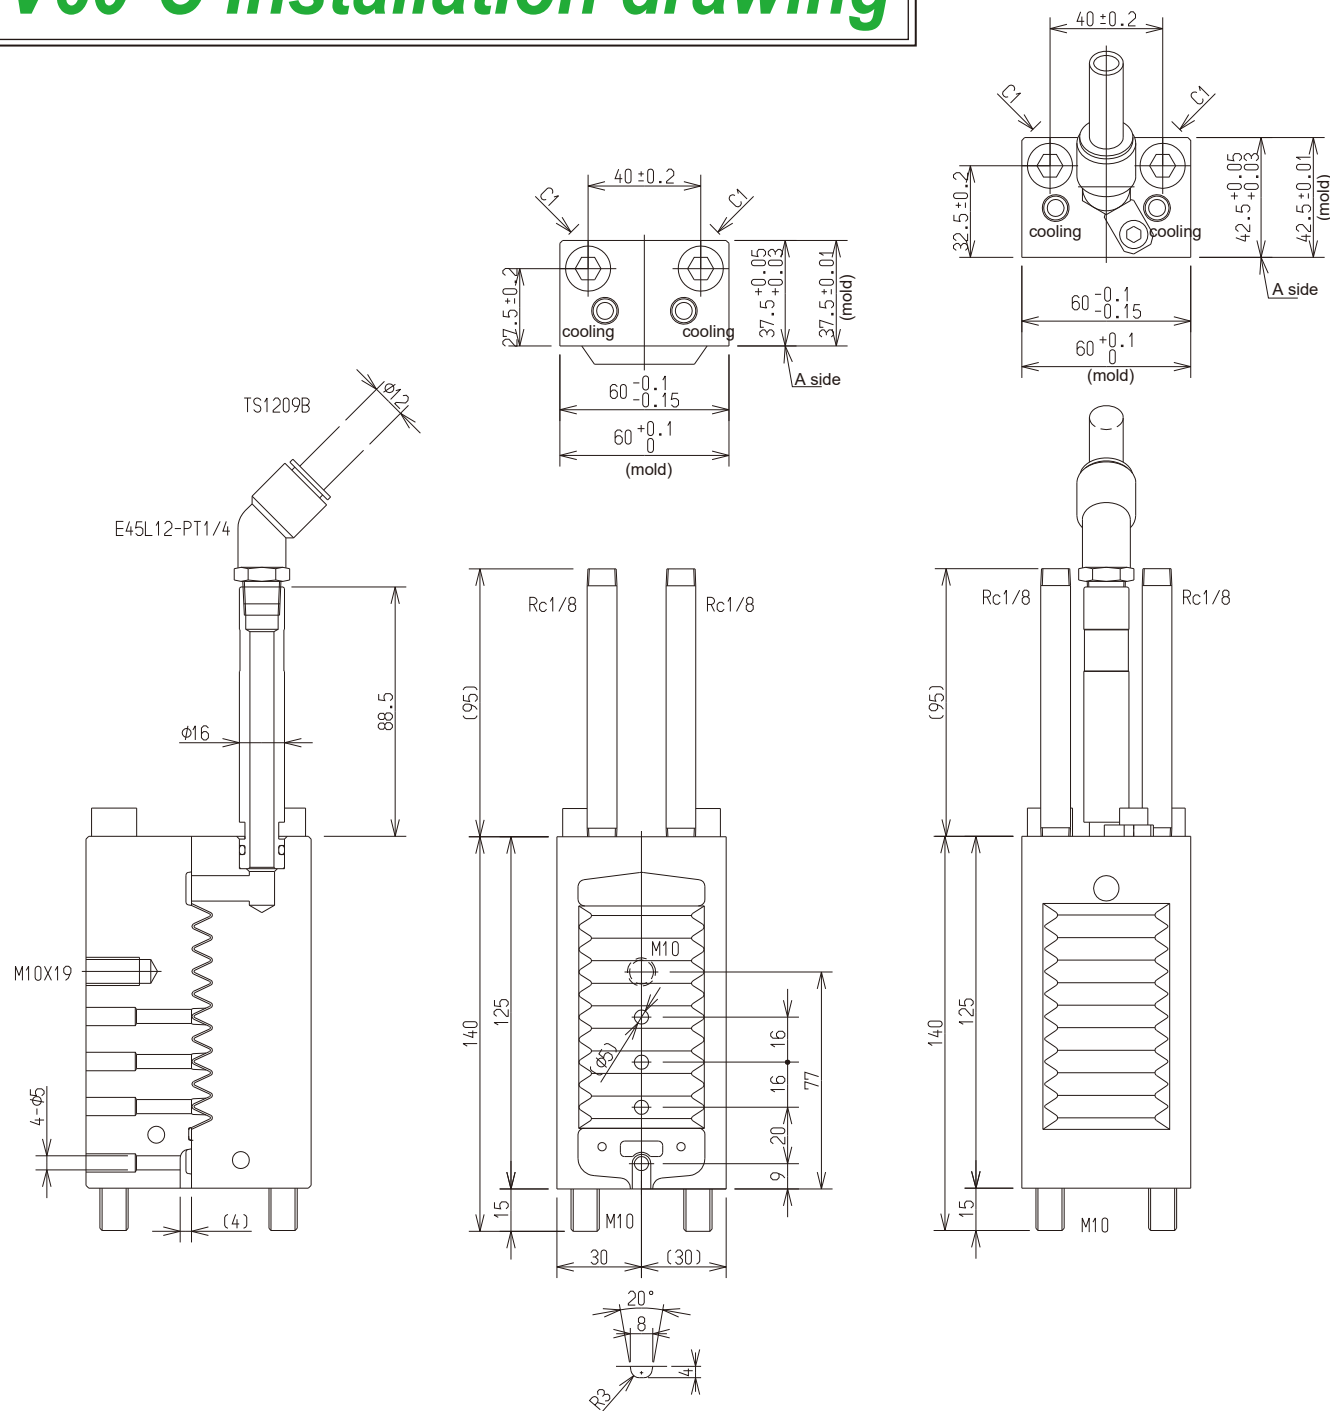

CVV60-C specification

Subject	Degassing Space
Vent Gap	0.25 cm ²
TS1209B	0.64 cm ²
E45L12-PT1/4	0.64 cm ²
Pipe	0.57 cm ²
Degassing Groove	0.27 cm ²

(Vacuum ability is equal to NVV020 vacuum valve)

CVV60-C usage example

Usage number	Dimension of chip
One used	Φ50
Two used	Φ70

(Injection speed is recommended as 2.5m/s)

(Remarks)

A side is higher than core parting line 0.02~0.03.



Profession Comes From Focus

DIE ENGINEERING CORPORATION